

# 2VRE-3000TF


DATA SHEET



## Tubular Flooded OPzS Battery Cell

Discover® Tubular Flooded RE Series Batteries provide superior deep cycling performance and reliability for demanding commercial, industrial and residential applications. Discover® Tubular Flooded RE Series Batteries utilize Advanced Tubular Plate Technology to deliver long service life with low maintenance requirements. RE Series Batteries provide reliable energy storage for Stationary Backup and Telecom Networks, Road Surface, and Rail Traffic Signaling Systems, Solar, Wind, and Hybrid Off-grid and Grid-tie renewable energy applications. Discover® Tubular Flooded RE Series batteries provide maximum efficiency per discharge cycle, and proven reliability in remote, high temperature, or unstable power network installations.

### Mechanical Drawings

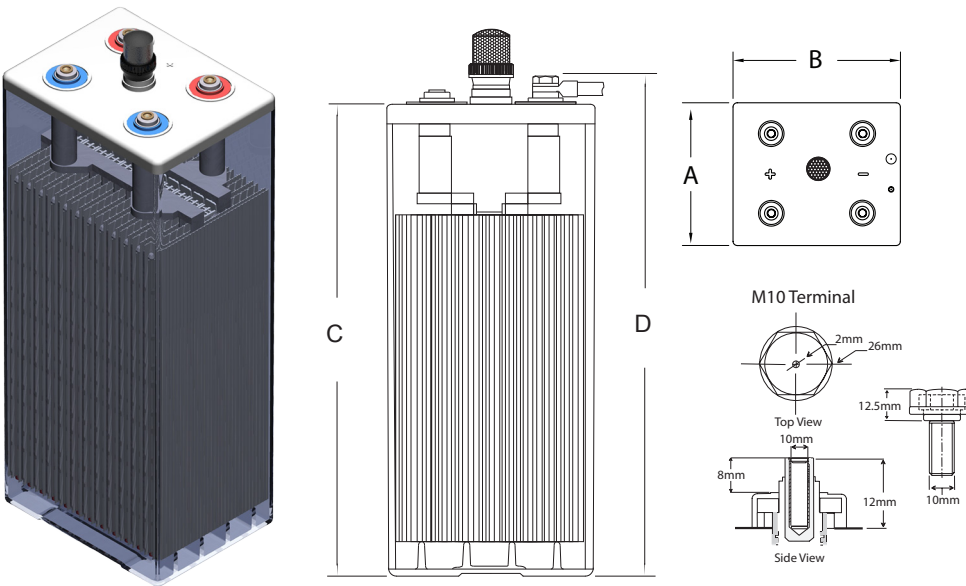

### Mechanical Specifications

|                    |                         |        |
|--------------------|-------------------------|--------|
| Industry Reference | 2V Tubular Flooded OPzS |        |
| Length (A)         | 9.2 in                  | 233 mm |
| Width (B)          | 8.3 in                  | 210 mm |
| Height (C)         | 25.4 in                 | 646 mm |
| Total Height (D)   | 26.4 in                 | 671 mm |
| Weight (Wet)       | 161 lbs                 | 73 kgs |
| Weight (Dry)       | 117 lbs                 | 53 kgs |
| Terminal           | M10                     |        |
| Poles              | 4                       |        |
| Cell(s)            | 1                       |        |
| Container          | SAN                     |        |

### Electrical Specifications

|                                    |                              |             |
|------------------------------------|------------------------------|-------------|
| Reference LVD (I10 at 20°C   68°F) | 20% DOD                      | 2.05V       |
|                                    | 50% DOD                      | 1.97V       |
|                                    | 80% DOD                      | 1.91V       |
| Cycle Life                         | 20% DOD                      | 7000 cycles |
|                                    | 50% DOD                      | 2950 cycles |
|                                    | 80% DOD                      | 1900 cycles |
| RINT                               | 0.292 mΩ                     |             |
| Short Circuit (20°C   68°F)        | 6950 A                       |             |
| Self Discharge (20°C   68°F)       | 2-3% per month               |             |
| Maximum Operating Temperature      | -35°C   -31°F - 50°C   122°F |             |
| Electrolyte (20°C   68°F)          | 1.24 S.G.                    |             |

### Electrical Specifications

| 1.85 VPC at 20°C   68°F |          |         |         | 1.75 VPC at 27°C   80°F |         |        |        | 1.75 VPC at 20°C   68°F |         |        |      |
|-------------------------|----------|---------|---------|-------------------------|---------|--------|--------|-------------------------|---------|--------|------|
| 240 HR                  | 120 HR   | 120 HR  | 100 HR  | 20 HR                   | 10 HR   | 8 HR   | 5 HR   | 3 HR                    | 1 HR    | 1 HR   | 1 HR |
| 1546 AH                 | 2.97 KWH | 1484 AH | 1454 AH | 1131 AH                 | 1028 AH | 933 AH | 897 AH | 760 AH                  | 0.9 KWH | 461 AH |      |

### Constant Power Reference in Watts / Cell to 1.92VPC at 20°C | 68°F

| 240 HR | 168 HR | 120 HR | 100 HR | 72 HR | 50 HR | 48 HR | 24 HR | 20 HR | 12 HR | 10 HR |
|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
| 11.1   | 15.3   | 20.5   | 23.9   | 31.5  | 42.3  | 43.8  | 75.4  | 86.6  | 126.4 | 143.9 |

### Benefits & Features

#### Unparalleled Performance

- Engineered to deliver 80% of rated capacity above 1.91 volts.

#### Long Cycle Life

- Tubular positive plates and proprietary alloy compositions to provide a 50% Depth of Discharge cycle life of up to 2950 cycles @ 20°C | 68°F.

#### Low Total Cost of Ownership

- Low cost per cycle. Lifetime value maximized especially in hybrid systems where using batteries can dramatically reduce generator run times delivering lower maintenance and fuel costs and less CO2 emissions.

#### Low Maintenance

- Low maintenance designs, clear case jars and available watering systems to ease electrolyte level maintenance.

#### Complete Battery Solution

- Complete and ready to install systems, filled and charged with all necessary installation accessories (available Dry Charged).

#### Safe

- Tested and verified for compliance to applicable International Safety Standards. Built-in Ceramic flame arrestors to guard against ignition risks.

#### IEC 61427 Compliant

- Tested for compliance with the International Electrical Commission requirements for battery performance and life in PV applications.

### Certified Quality

Discover Energy Corp. and its facilities and products are certified to multiple standards and compliance:

- IEC 61427: Requirements for Photovoltaic Energy Systems
- IEC 60896-11: Requirements for Vented Lead-Acid batteries
- DIN 40736-1: Specifications for RE Series Cells
- DIN 40737-3: Specifications for RE Series Blocks
- EN 50272-2: Safety Requirements for Stationary batteries
- ISO 9001, ISO 14001, BS OHSAS 180: Manufacturing and Production facilities
- ETTS Germany





### Contact Us




Unit 5-13511 Crestwood Place,  
Richmond, BC, V6V 2E9, Canada  
Email: info@discover-energy.com  
www.discover-energy.com


### Expected Service Life vs. Operating Temperature

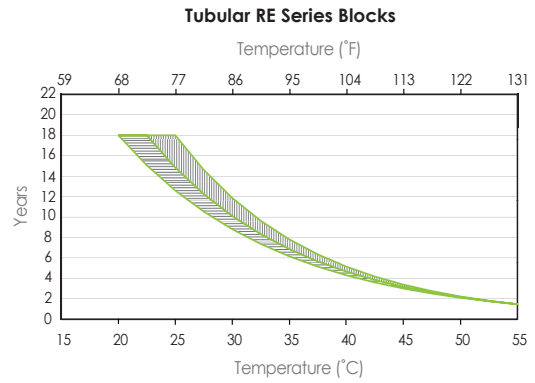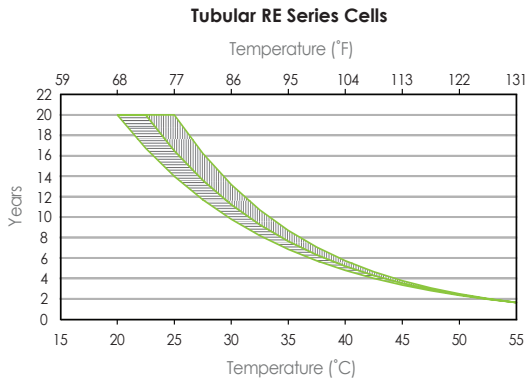


### Self-Discharge Characteristics

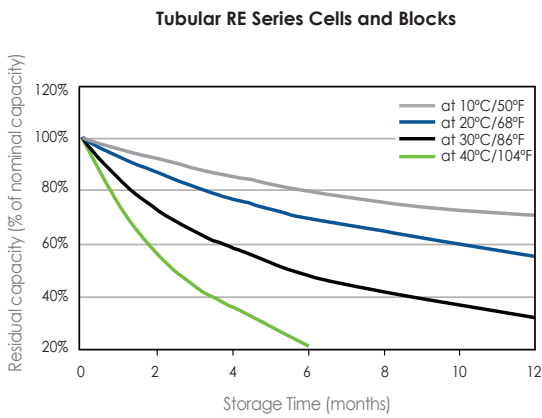

### Capacity vs. Temperature

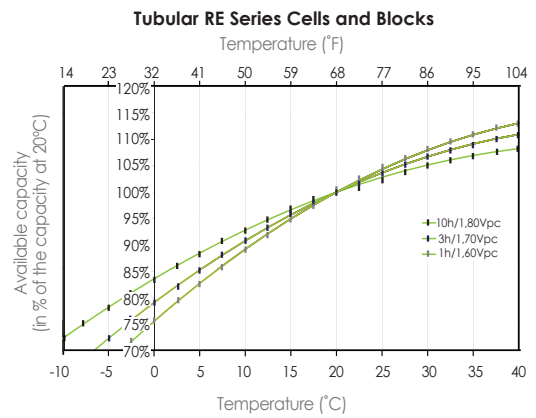

### Float Voltage Setting vs. Operating Temperature

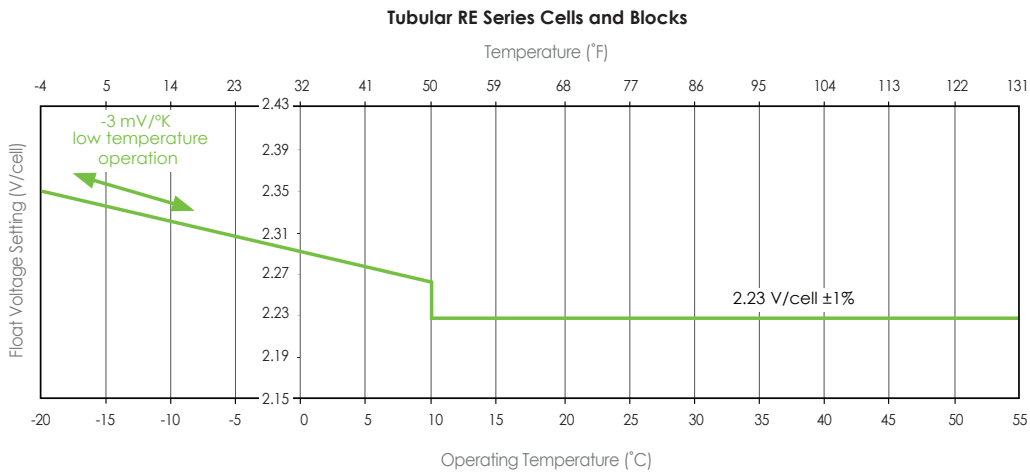

### Number of Cycles vs. DOD

